

CUT OPENING FOR NEW EXTERIOR TYPE DOOR & PROVIDE LINTEL SEE NOTE NO. 13.

TIE NEW CONCRETE TO EXISTING W/ 1-10M ROD 200mm LONG & MIN. 100mm INTO WALL EVERY OTHER COURSE

UNDERPINNING NUMBERS INDICATE SEQUENCE OF WORK

WALL INSULATION SEE NOTE NO.10

RSI 1.41 RIGID INSUL. TO MIN. 600mm BELOW GRADE

FLOOR DRAIN


NEW GUARD SEE SECTION 'A'

HANDRAIL 8R DN


CONNECT NEW WEEPING TILE TO EXISTING

POURED CONCRETE SLAB & STEPS 32MPa W/ 5%-8% AIR ENTRAINMENT

**PLAN**

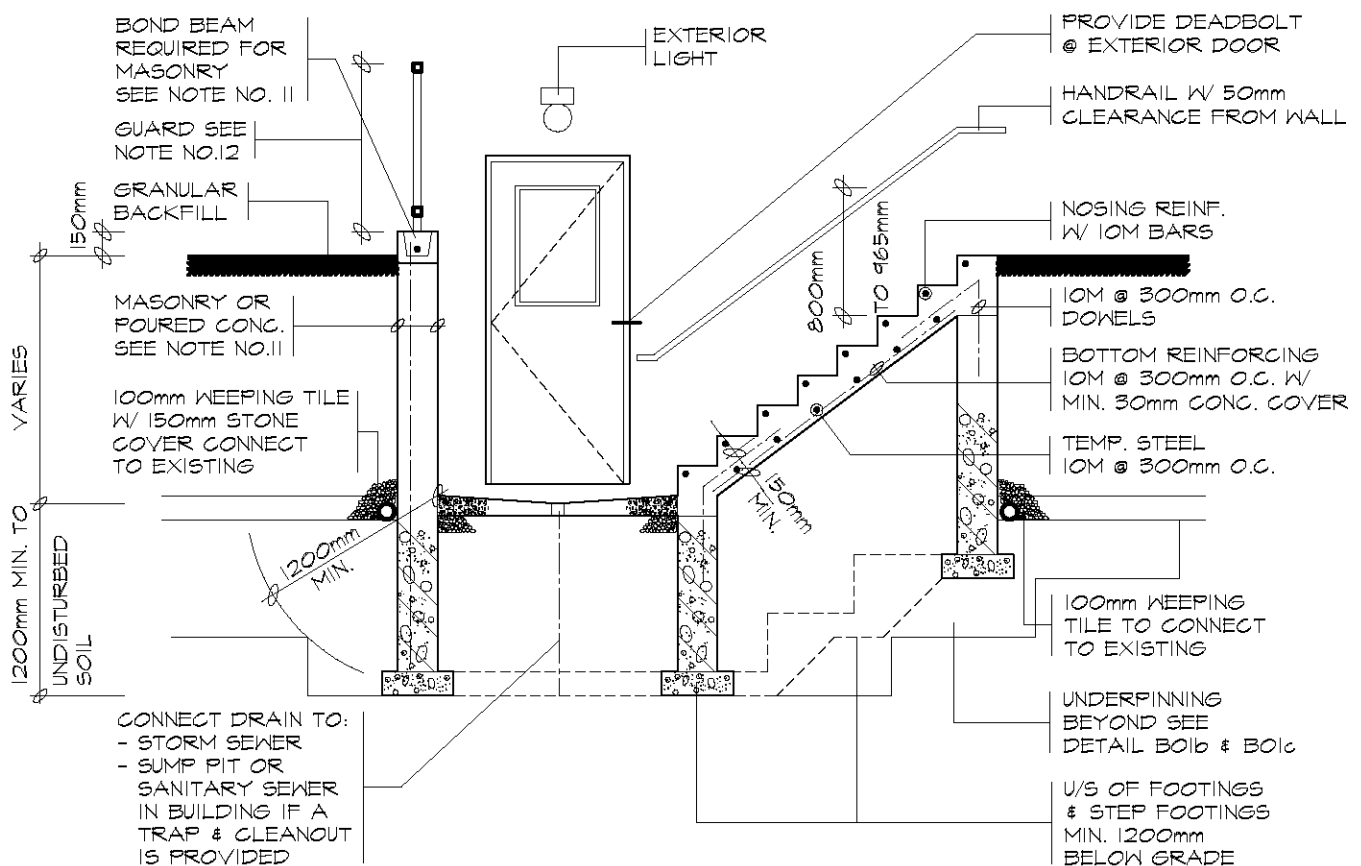

**SECTION 'A'**

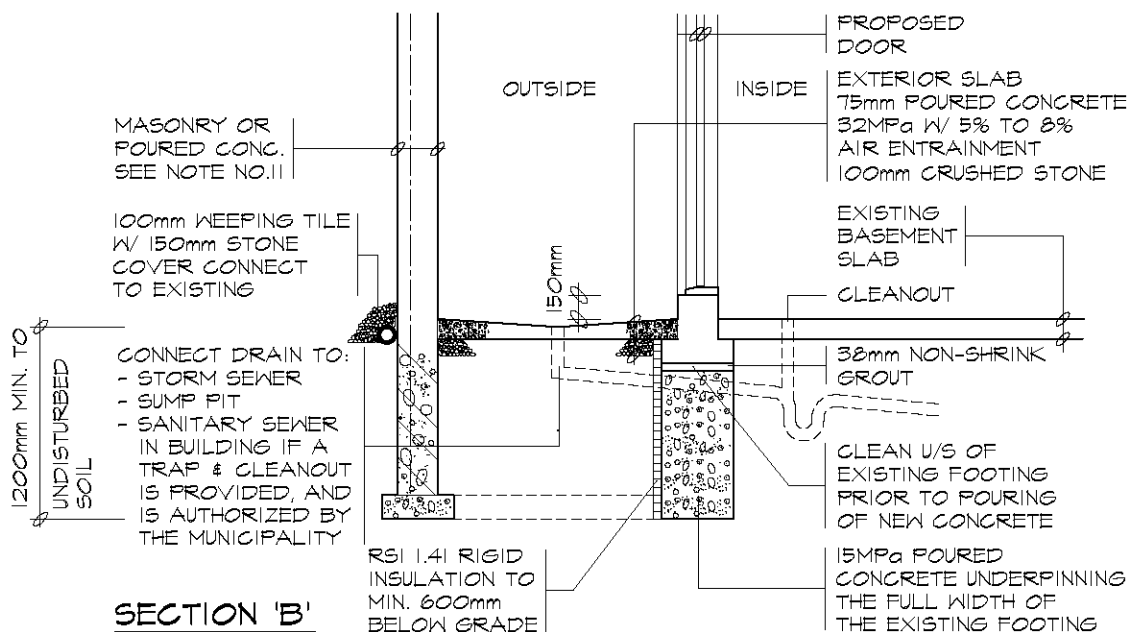

**SECTION 'B'**